




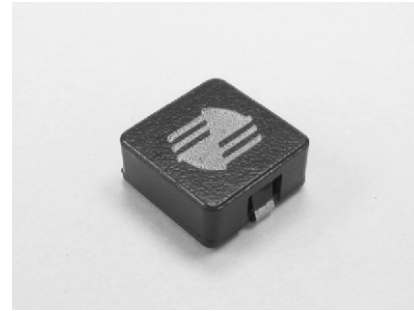


-  Used in high power application
-  Large permissible DC current
-  Ideal for computers and portable power devices, DC-DC converters, energy storage applications and Input-Output filter applications
-  Operating temperature -40 C to +125 C
-  RoHS compliant



ELECTRICAL SPECIFICATION @ 25°C


Part Number	Inductance ²		Inductance ³ @ Irated (uH Typ)	Irated ⁴ (A)	DCR (m Ω)		Inductance ⁵ @ Bias (uH±20%)	Saturation ⁶ Current Isat (A)	Heating ⁷ Current Idc (A)	Marking (XXXY)
	Nominal (uH)	Tolerances (%)			Typ	Max				
RIS1140A-201LF	0.20	±15	0.17	30	0.45	0.55	0.18 @ 21Adc	30	38	201L
RIS1140A-241LF	0.24	±15	0.20	29	0.85	0.95	0.22 @ 27Adc	30	29	241L
RIS1140A-401LF	0.40	±15	0.34	29	1.05	1.15	0.36 @ 17Adc	29	29	401L
RIS1140A-471LF	0.47	±15	0.40	27	1.53	1.68	0.42 @ 24Adc	29	27	471L
RIS1140A-601LF	0.60	±15	0.51	22	1.70	1.87	0.56 @ 15Adc	22	27	601L
RIS1140A-102LF	1.00	±15	0.90	20	2.80	3.20	0.87 @ 26Adc	20	21	102L
RIS1140A-152LF	1.50	±15	1.35	16	4.50	5.00	1.20 @ 17Adc	18	16	152L
RIS1140A-182LF	1.80	±15	1.57	16	4.50	5.00	1.57 @ 16Adc	16	16	182L
RIS1140A-222LF	2.20	±15	2.10	13	6.60	7.00	1.80 @ 20Adc	14	13	222L
RIS1140A-472LF	4.70	±15	4.00	6.5	12.90	14.20	3.85 @ 7Adc	7.6	6.5	472L

Notes:

- Ordering Information: RIS1140A - bbbaFc.
RIS1140A = Product Type.
a = Tolerance of Inductance (L = ± 15%).
bbb = Inductance value in uH (i.e. 241 = 0.24uH; 102 = 1.00uH; 222 = 2.2uH).
F = Internal Control Code.
c = Packaging Code (T = Tape & Reel Packaging in 13 inch Reel).
- Inductance is tested at 0.1Vrms, 100kHz @ 0Adc.
- Inductance at Irated is a typical inductance value for the component taken at rated current.
- The rated current listed is the lower of the saturation current @ 25°C or the heating current.
- The inductance at Bias is the controlled inductance value measured after subjecting the part to the listed dc bias current.
- Saturation current, Isat, indicates the value of DC current when the inductance is 20% (typical) lower than its initial value at an ambient temperature of 25°C.
- Heating current, Idc, is the current required to raise the component temperature by approximately 40°C. The heating current is determined by mounting the component on a typical PCB and applying current for 30 minutes.
- Operating temperature range: -40°C to +125°C.
- The part temperature (ambient temperature + temperature rise) should not exceed the upper limit of the operating temperature under worst case operating conditions. Circuit design, component placement, PWB trace size and thickness, airflow and other cooling provisions all affect the part temperature. Part temperature should be verified in the end application.



MECHANICAL DIMENSIONS

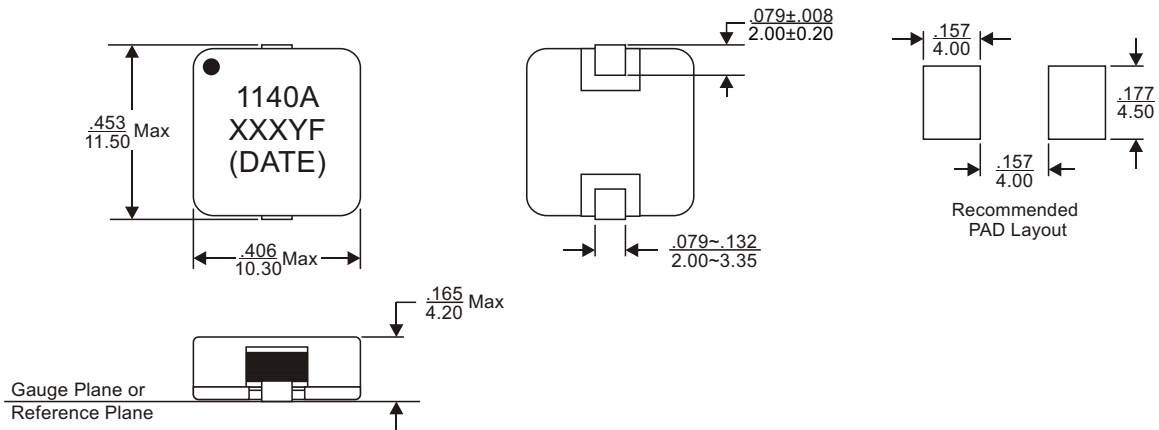


Notes:


- 10. All dimensions are specified in $\frac{\text{inches}}{\text{mm}}$ with higher precedence in mm.
- 11. Unless otherwise specified, all tolerances are $\pm \frac{.010}{0.25}$.

Weight (in gram)	: 2.0 typ.
Tape & Reel	: 850 / reel

SCHEMATIC



PACKAGING

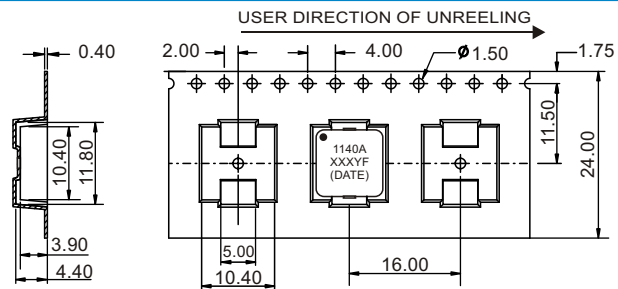

FOR MORE INFORMATION, PLEASE CONTACT

HEADQUARTER
1/F., Harbour View 1, No.12 Science Park East Avenue,
Phase II, Hong Kong Science Park, Shatin, N.T.
Hong Kong
Tel: (852) 2954 3333 Fax: (852) 2954 3304
Email: eempl@eleceltek.com
Website: <http://www.eleceltek.com> / www.eemagnetic.com

Information herein is for reference only and subject to change without notice. It does not constitute any representation, warranty or commitment of the company in respect of the products in any aspect. All logos, brands and product names mentioned herein are trademarks or registered trademarks of their respective owners. The company does not assume any liability arising out of the application or use of any product or circuit described herein. Copyrights 2009, E & E Magnetic Products Limited.

1/F., Harbour View 1, No.12 Science Park East Avenue, Phase II, Hong Kong Science Park, Shatin, N.T. Hong Kong
Tel: (852) 2954 3333 • Fax: (852) 2954 3304