

## Data Sheet

**Customer:**

**Product:** Automotive Grade Multilayer Common Mode Filter – CMX..A Series

**Sizes.:** 0504 / 0805

**Issued Date:** 03-Jan-18

**Edition:** REV.A



VIKING TECH CORPORATION  
光韻科技股份有限公司  
No.70, Guangfu N. Rd., Hukou  
Township, Hsinchu County  
303, Taiwan (R.O.C)

TEL:886-3-5972931  
FAX:886-3-5972935•886-3-5973494  
E-mail:sales@viking.com.tw


VIKING TECH CORPORATION KAOHSIUNG BRANCH  
光韻科技股份有限公司高雄分公司  
No.248-3, Sin-Sheng Rd., Cian-Jhen Dist., Kaohsiung,  
806, Taiwan

TEL:886-7-8217999  
FAX:886-7-8228229  
E-mail:sales@viking.com.tw

VIKING ELECTRONICS (WUXI) CO., LTD.  
光韻電子(無錫)有限公司  
No.22 Xixia Road, Machinery & Industry Park,  
National Hi-Tech Industrial Development Zone  
of Wuxi, Wuxi, Jiangsu Province, China  
Zip Code:214028  
TEL:86-510-85203339  
FAX:86-510-85203667•86-510-85203977  
E-mail:china@viking.com.tw

Produced by (QC)	Checked (QC)	Approved by (QC)	Prepared by (Sales)	Accepted by (Customer)
03-Jan-18	03-Jan-18	03-Jan-18	03-Jan-18	
<i>Kris Chen</i>	<i>Ben Chang</i>	<i>Ben Chang</i>		



## Multilayer Common Mode Filter



### ■ Features and Application

- Powerful components with composite co-fired material to solve EMI problem for high speed differential signal transmission line as USB, and LVDS, without distortion to high speed signal transmission.
- MIPI, MHL serial interface in mobile device
- AEC-Q200 Compliance

### ■ Dimensions

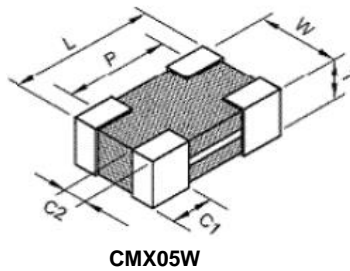

Type	Sizes (Inch)	L (mm)	W (mm)	T (mm)	P (mm)	C1 (mm)	C2 (mm)
CMX04W	0504	1.25±0.10	1.00±0.10	0.60±0.10	0.50±0.10	0.30±0.10	0.20±0.15
CMX05W	0805	2.00±0.20	1.25±0.20	1.00±0.10	1.60±0.20	0.40±0.20	0.30±0.20

### ■ Part Numbering

CMX	04W	Y	T	900	A
Product Type	Dimensions LxW 04W: 0504 05W: 0805	Impedance Tolerance Y: ±25%	Packaging Code T: Taping Reel	Impedance 900: 90Ω	Function Code A: Automotive Grade

### ■ Standard Electrical Specifications

#### CMX04W Type







Impedance (Ω)	Tolerance	Test Condition (MHz)	DCR (Ω) max.	Rated Current (mA) max.	Rated Voltage Vdc (V)	Withstanding Voltage (V)	Insulation Resistance (MΩ) min.
67	±25%	100	0.50	300	10	25	200
90	±25%	100	0.60	300	10	25	200

#### CMX05W Type

Impedance (Ω)	Tolerance	Test Condition (MHz)	DCR (Ω) max.	Rated Current (mA) max.	Rated Voltage Vdc (V)	Withstanding Voltage (V)	Insulation Resistance (MΩ) min.
67	±25%	100	0.40	400	10	25	200
90	±25%	100	0.40	400	10	25	200
120	±25%	100	0.40	400	10	25	200
160	±25%	100	0.50	400	10	25	200
180	±25%	100	0.50	400	10	25	200
220	±25%	100	0.50	300	10	25	200







**Chip Common Mode Filter**

**Characteristics**

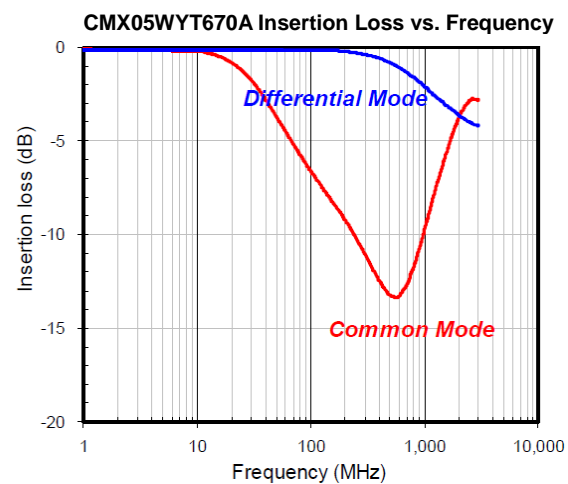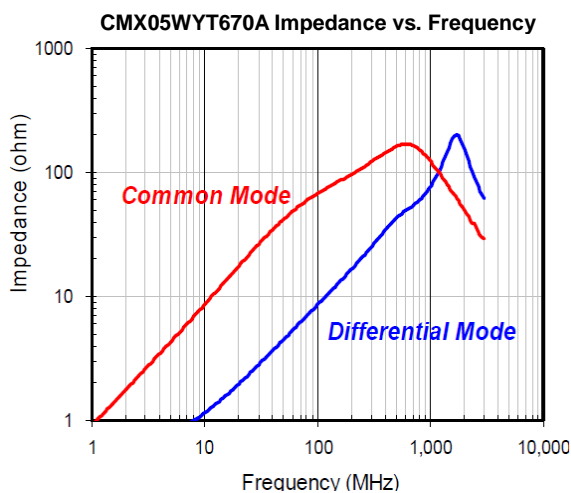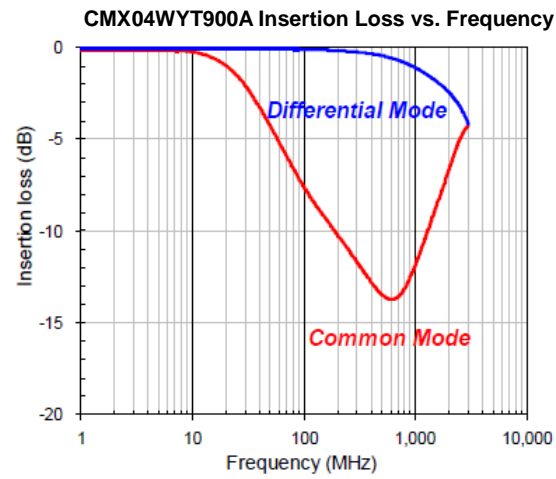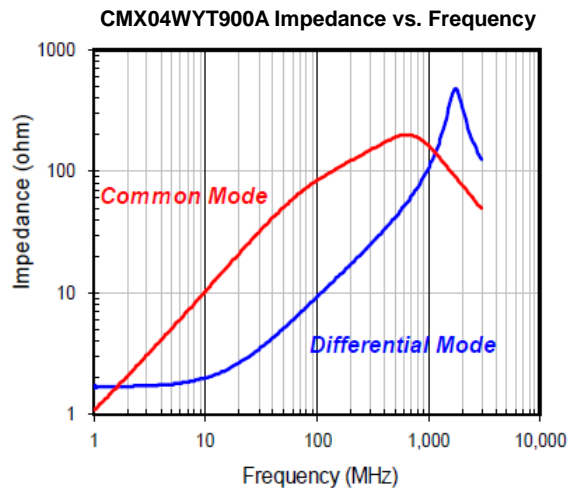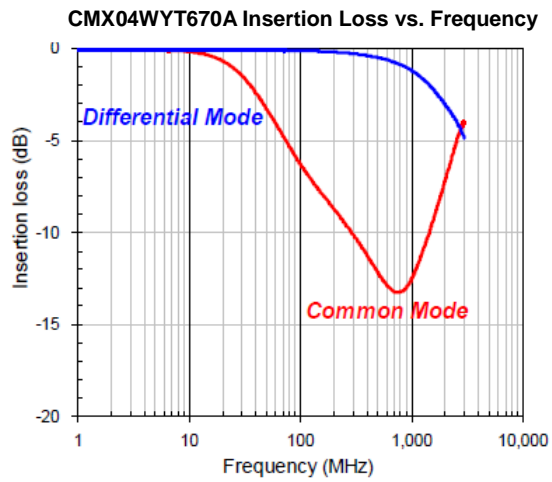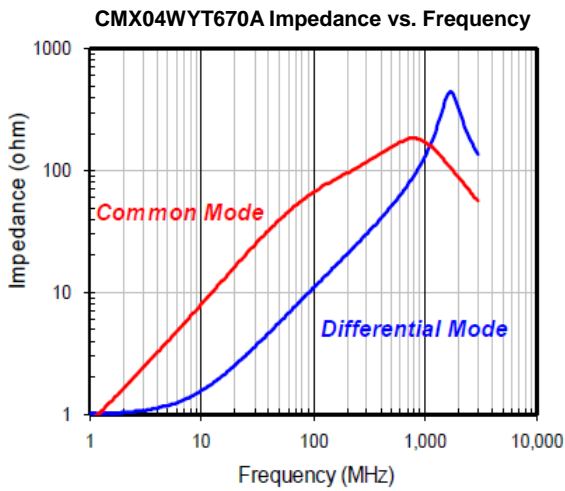





**Chip Common Mode Filter**

**■ Characteristics**

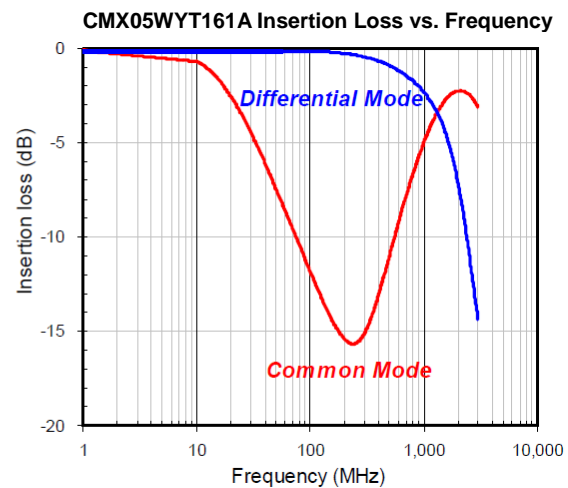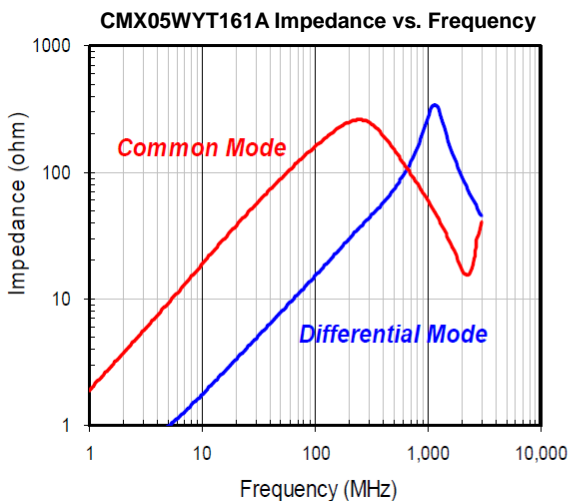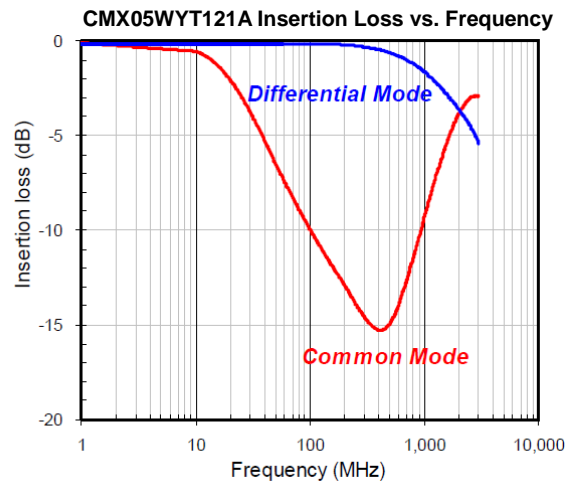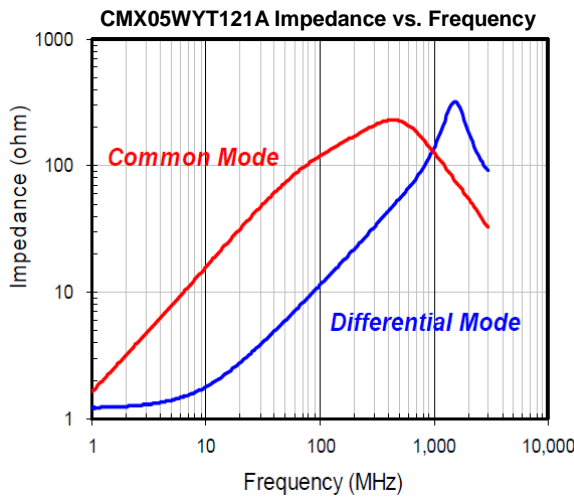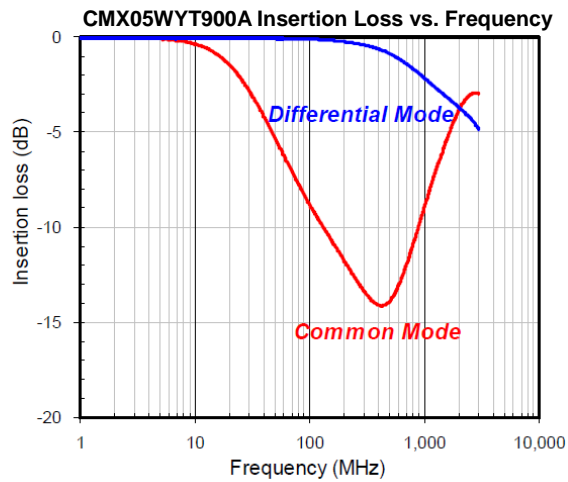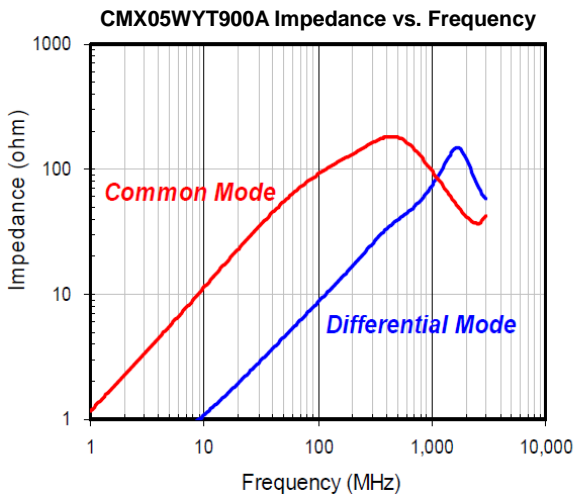

**Chip Common Mode Filter**

**■ Characteristics**

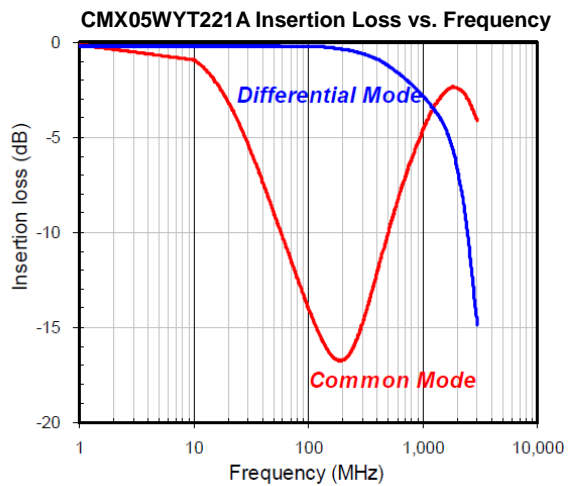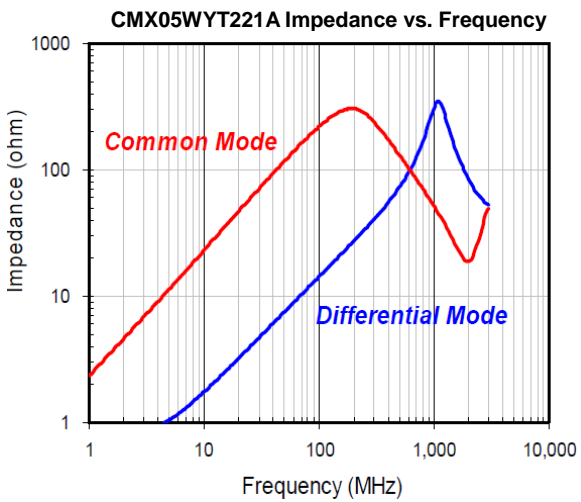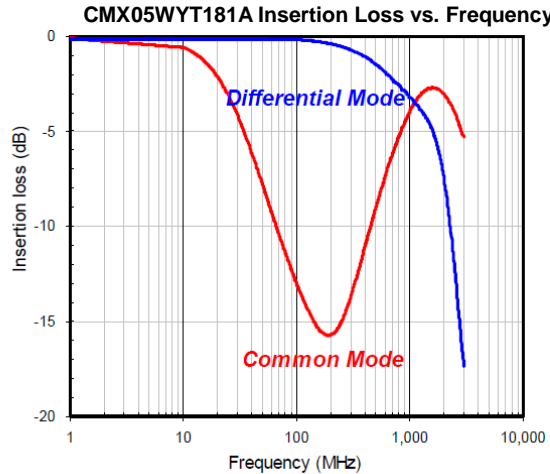
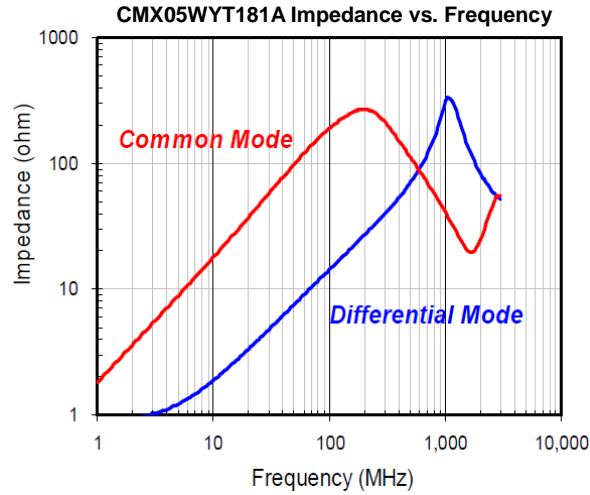


**■ Measuring Circuits**

**CMX04W**

(A): Common mode



(B): Differential mode



**CMX05W**


(A): Common mode

(B): Differential mode




**Chip Common Mode Filter**


**■ Circuit Configuration**

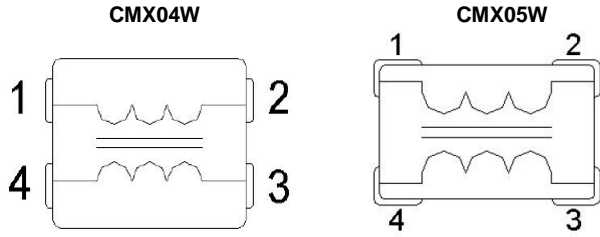

**■ Recommended Land Pattern**

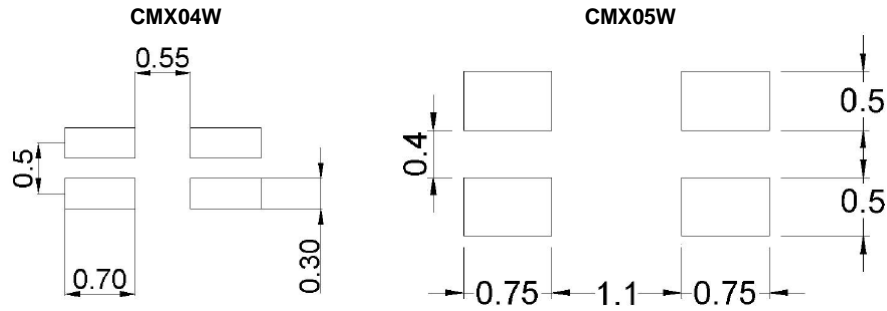

**■ Recommended Soldering Conditions**

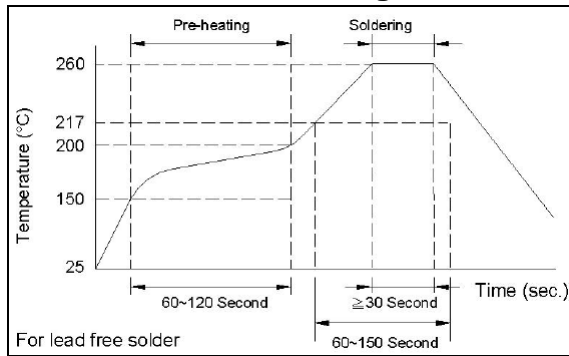

**Chip Common Mode Filter**

**■Environmental Characteristics**

Items	Requirement	Test Conditions / Test Methods
Temperature Cycle	No mechanical damage Impedance should be within $\pm 20\%$ of the initial value	Temperature: $-55 \sim +125^{\circ}\text{C}$ Cycle : 1000cycles Dwell time: 30minutes Measurement : at ambient temperature 24 hrs after test completion
Operational Life		Temperature: $125^{\circ}\text{C} \pm 5^{\circ}\text{C}$ Test time: 1000hrs Apply current : full rated current Measurement : at ambient temperature 24 hrs after test completion
Biased Humidity		Temperature: $85 \pm 2^{\circ}\text{C}$ Humidity : 85 % RH Test time: 1000hrs Apply current : full rated current Measurement : at ambient temperature 24 hrs after test completion
High Temperature Exposure		Temperature: $125 \pm 5^{\circ}\text{C}$ Test time: 1000hrs Measurement : at ambient temperature 24 hrs after test completion
Resistance to Solder Heat	Impedance should be within $\pm 20\%$ of the initial value	Solder temperature: $260 \pm 5^{\circ}\text{C}$ Flux: Rosin DIP time: $10 \pm 1$ sec
Terminal Strength	No mechanical damage	Apply force(F): 17.7N Test time: 60 sec
Board Flex		Epoxy-PCB(1.6mm) Deflection 2mm(min) 60s min holding time
Mechanical Shock	No mechanical damage	Condition F: 1500g's/0.5ms/half sine
Vibration	DCR value should be within $\pm 30\%$ of the initial value	5g's for 20min, 12cycles each of 3 orientations Test from 10-2000Hz., 12cycleseach of orientations


**■Storage Temperature:  $18 \sim 28^{\circ}\text{C}$ ; Humidity < 80%RH**

**■Operating Temperature:  $-55 \sim +125^{\circ}\text{C}$**

**Chip Common Mode Filter**


**■Packaging**

Packaging Quantity & Reel Specifications

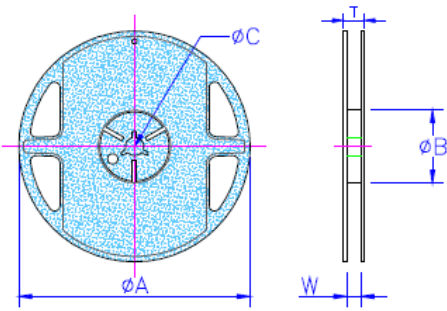


Type	ØA (mm)	ØB (mm)	ØC (mm)	W (mm)	T (mm)	Quantity (EA)
CMX04W	178±1	60+0.5/-0	13.0±0.2	9.0±0.5	12.0±0.15	4000
CMX05W	178±1	60+0.5/-0	13.0±0.2	9.0±0.5	12.0±0.15	3000

Paper Tape Specifications

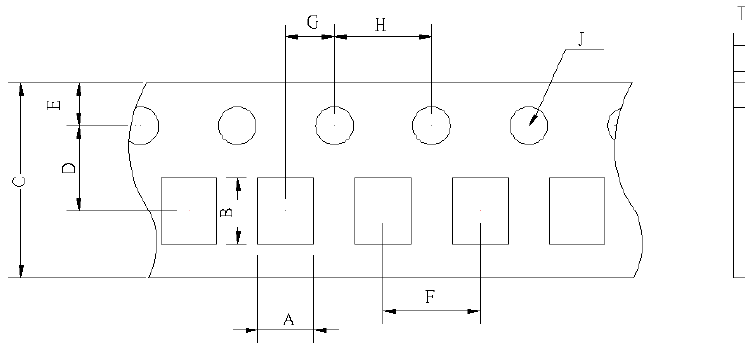

Type	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F (mm)	G (mm)	H (mm)	J (mm)	T (mm)
CMX04W	1.20±0.05	1.45±0.05	8.0±0.10	3.5±0.05	1.75±0.05	4.00±0.10	2.00±0.05	4.00±0.10	1.55±0.05	0.75±0.03

Emboss Plastic Tape Specifications

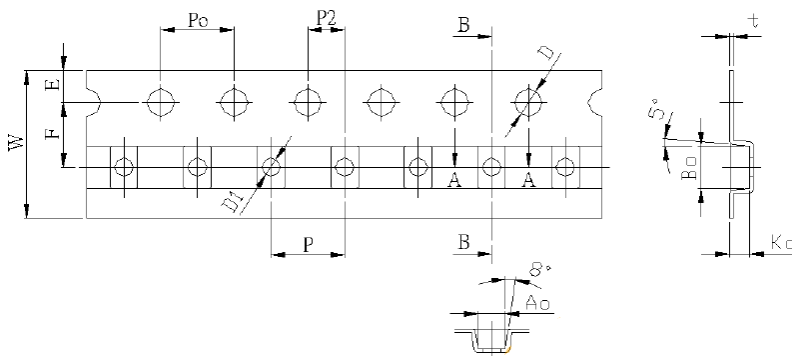

Type	A0 (mm)	B0 (mm)	W (mm)	E (mm)	F (mm)	P (mm)	P0 (mm)	P2 (mm)	D (mm)	D1 (mm)	K0 (mm)	t (mm)
CMX05W	1.40±0.10	2.30±0.10	8.0±0.10	1.75±0.10	3.50±0.05	4.00±0.10	4.00±0.10	2.00±0.05	1.5+010	1.00±0.10	1.13±0.10	0.22±0.05