


VT 型片式铝电解电容

VT Series Chip Type Aluminum Electrolytic Capacitors

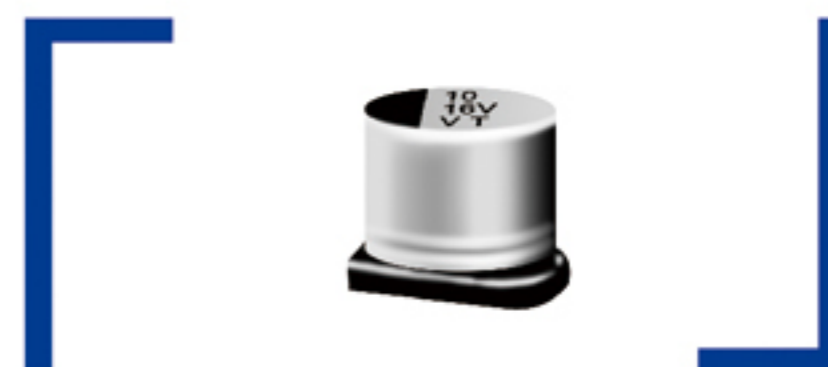


■ 特点 Features

- ◎ 产品直径。 Case diameter: Φ 4mm – Φ 10mm.
- ◎ 适用于再流焊。 Reflow soldering is available.
- ◎ 适用于高密度表面组装。 Available for high density surface mounting.
- ◎ 工作温度范围宽 ($-40 \sim +105^{\circ}\text{C}$) Operating over wide temperature range.
- ◎ ROHS指令已对应完毕。 Adapted to the ROHS directive.

■ 主要技术性能

项目 Items	特性 Characteristics							
工作温度范围 Operating Temperature Range	-40°C ~ +105°C							
额定电压范围 Rated Voltage Range	6.3V ~ 50V							
标称容量范围 Nominal Capacitance Range	0.1 ~ 1500 μF							
标称容量允许偏差 Nominal Capacitance Tolerance	$\pm 20\%$ (20°C, 120Hz)							
漏电流 Leakage Current	$I \leq 0.01C_R V_R$ or 3(μA), 取较大者 (2分钟) C_R : 标称容量 (μF) U_R : 额定电压 (V) $I \leq 0.01C_R V_R$ or 3(μA) Whichever is greater(at 20°C, After 2 minutes) C_R : Nominal Capacitance (μF) U_R : Rated voltages (V)							
损耗角正切 ($\text{tg } \delta$) Dissipation Factor (Max) 20°C, 120Hz	U_R (V)	4	6.3	10	16	25	35	50
	$\text{tg } \delta$	0.35	0.28	0.24	0.20	0.16	0.14	0.12
耐久性 Load Life	+105°C施加额定电压1000小时后, 电容器应满足以下要求: After 1000 hours' application of rated voltage at 105°C, the capacitor shall meet the following requirement:							
	电容量变化率 Capacitance Change	$\pm 20\%$ 初始值以内 Within $\pm 20\%$ of the initial value						
	损耗角正切 Dissipation Factor	$\leq 200\%$ 初始规定值 Not more than 200% of the initial specified value						
	漏电流 Leakage Current	\leq 初始规定值 Not more than the initial specified value						
高温贮存 Shelf Life	+105°C贮存1000小时后, 电容器应满足以上耐久性要求: After storage for 1000 hours at +105°C, the capacitors shall meet the requirement of load life above:							
低温特性 Low Temperature Stability 阻抗比 Impedance Ratio (120Hz)	U_R (V)	4	6.3	10	16	25	35	50
	$Z(-25^{\circ}\text{C})/Z(+20^{\circ}\text{C})$	7	4	3	2	2	2	2
	$Z(-40^{\circ}\text{C})/Z(+20^{\circ}\text{C})$	15	8	6	4	4	3	3
耐焊接热 Resistance to Soldering Heat	在250°C的条件下, 电容器在热板上保持30秒, 然后从热板上取出电容器, 让其在室温下恢复, 电容器应满足以下要求: The capacitors shall be kept on the hot plate maintained at 250°C for 30 seconds. After removing from the hot plate and restored at room temperature, they meet the following requirement.							
	电容量变化率 Capacitance Change	$\pm 10\%$ 初始值以内 Within $\pm 10\%$ of the initial value						
	损耗角正切 ($\text{tg } \delta$) Dissipation Factor	\leq 初始规定值 Not more than the initial specified value						
	漏电流 Leakage Current	\leq 初始规定值 Not more than the initial specified value						

■ 尺寸图 Dimensions

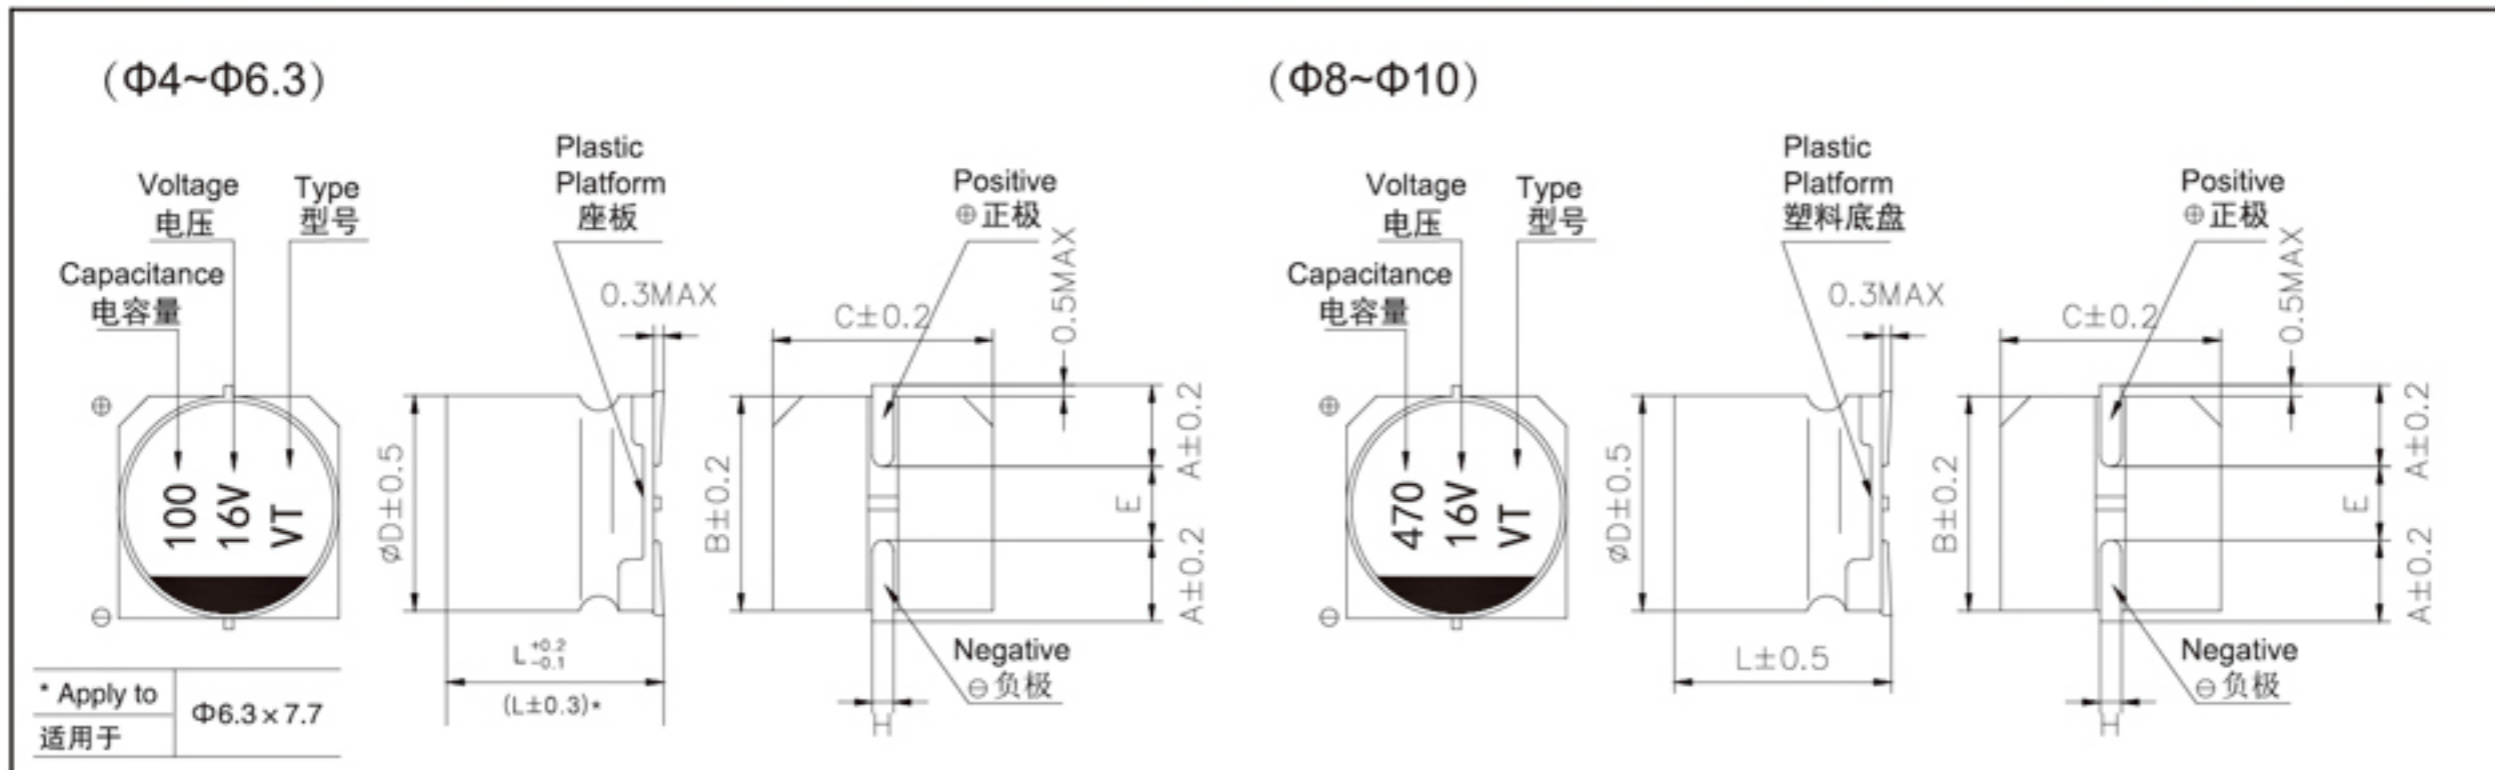

	4 × 5.4	5 × 5.4	6.3 × 5.4	6.3 × 7.7	8 × 6.5	8 × 10.5	10 × 10.5	(mm)
A	1.3	2.1	2.4	2.4	2.9	2.9	3.2	
B	4.3	5.3	6.6	6.6	8.3	8.3	10.3	
C	4.3	5.3	6.6	6.6	8.3	8.3	10.3	
E	1.0	1.3	2.2	2.2	2.3	3.1	4.5	
L	5.4	5.4	5.4	7.7	6.5	10.5	10.5	
H	0.5~0.8				0.8~1.1			

◇ 标称电容量、额定电压、额定纹波电流与外形尺寸对应表

Nominal capacitance, rated voltage, rated ripple current and case size table

V μF	6.3		10		16		25		35		50	
	D×L mm	I~ mA	D×L mm	I~ mA	D×L mm	I~ mA	D×L mm	I~ mA	D×L mm	I~ mA	D×L mm	I~ mA
0.1											4 × 5.4	2.3
0.22											4 × 5.4	3.4
0.33											4 × 5.4	4.1
0.47											4 × 5.4	5
1.0											4 × 5.4	10
2.2											4 × 5.4	16
3.3									4 × 5.4	13	4 × 5.4	16
4.7							4 × 5.4	22	4 × 5.4	22	5 × 5.4	23
10					4 × 5.4	28	5 × 5.4	28	5 × 5.4	30	6.3 × 5.4	32
22	4 × 5.4	29	5 × 5.4	30	5 × 5.4	39	6.3 × 5.4	55	6.3 × 5.4	60	6.3 × 7.7	51
33	5 × 5.4	34	5 × 5.4	34	5 × 5.4	35	6.3 × 5.4	65	8 × 6.5	84	6.3 × 7.7	70
47	5 × 5.4	46	6.3 × 5.4	48	6.3 × 5.4	70	6.3 × 5.4	70	6.3 × 7.7	80	6.3 × 7.7	80
100	6.3 × 5.4	71	6.3 × 5.4	69	6.3 × 5.4	70	6.3 × 7.7	100	8 × 10.5	296	8 × 10.5	230
220	6.3 × 7.7	120	6.3 × 7.7	120	6.3 × 7.7	120	8 × 10.5	320	10 × 10.5	435	10 × 10.5	375
330	8 × 10.5	290	8 × 10.5	305	8 × 10.5	425	10 × 10.5	450	10 × 10.5	450		
470	8 × 10.5	330	8 × 10.5	340	8 × 10.5	340	10 × 10.5	490				
1000	8 × 10.5	340	10 × 10.5	410	10 × 10.5	450						
1500	10 × 10.5	475										

I~ = Rated ripple current (mA) (105°C, 120Hz) I~ = 额定纹波电流 (mA) (105°C, 120Hz)

◇ 额定纹波电流的频率系数 Frequency coefficient of ripple current

Frequency 频率	50Hz	120Hz	300Hz	1KHz	10K~100KHz
Coefficient 系数	0.70	1.00	1.17	1.36	1.50