




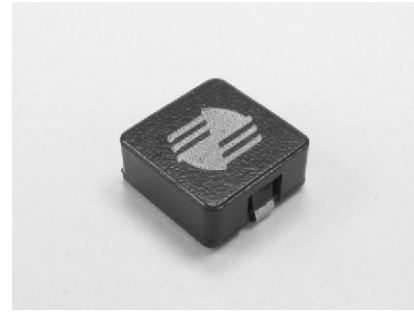


-  Low profile and low DCR
-  High energy storage and high DC current
-  Ideal for computers and portable power devices, DC-DC converters, energy storage applications and Input-Output filter applications
-  Operating temperature -40 C to +125 C
-  RoHS compliant




ELECTRICAL SPECIFICATION @ 25°C									
Part Number	Inductance @0Adc ²		Inductance ³ @ Irated (uH Typ)	Irated ⁴ (A)	DCR (mΩ)		Saturation ⁵ Current Isat (A)	Heating ⁶ Current Idc (A)	Marking (XXXY)
	Nominal (uH)	Tolerances (%)			Typ	Max			
	RIS1344A-351MF	0.35	±20	0.28	40	1.30	1.80	40	61
RIS1344A-651MF	0.65	±20	0.52	32	2.30	2.80	32	45	651M
RIS1344A-112MF	1.10	±20	0.88	24	3.60	4.20	24	34	112M
RIS1344A-182MF	1.80	±20	1.44	18	4.50	6.10	18	25	182M

Notes:

1. Ordering Information: RIS1344A - bbbaFc.
 RIS1344A = Product Type.
 a = Tolerance of Inductance (M = ± 20%).
 bbb = Inductance value in uH (i.e. 351 = 0.35uH; 112 = 1.10uH).
 F = Internal Control Code.
 c = Packaging Code (T = Tape & Reel Packaging in 13 inch Reel).
2. Inductance is tested at 0.1Vrms, 100kHz @ 0Adc.
3. Inductance at Irated is a typical inductance value for the component taken at rated current.
4. The rated current listed is the lower of the saturation current @ 25°C or the heating current.
5. Saturation current, Isat, indicates the value of DC current when the inductance is 20% (typical) lower than its initial value at an ambient temperature of 25°C.
6. Heating current, Idc, is the current required to raise the component temperature by approximately 40°C. The heating current is determined by mounting the component on a typical PCB and applying current for 30 minutes.
7. Operating temperature range: -40°C to +130°C.
8. The part temperature (ambient temperature + temperature rise) should not exceed the upper limit of the operating temperature under worst case operating conditions. Circuit design, component placement, PWB trace size and thickness, airflow and other cooling provisions all affect the part temperature. Part temperature should be verified in the end application.



MECHANICAL DIMENSIONS

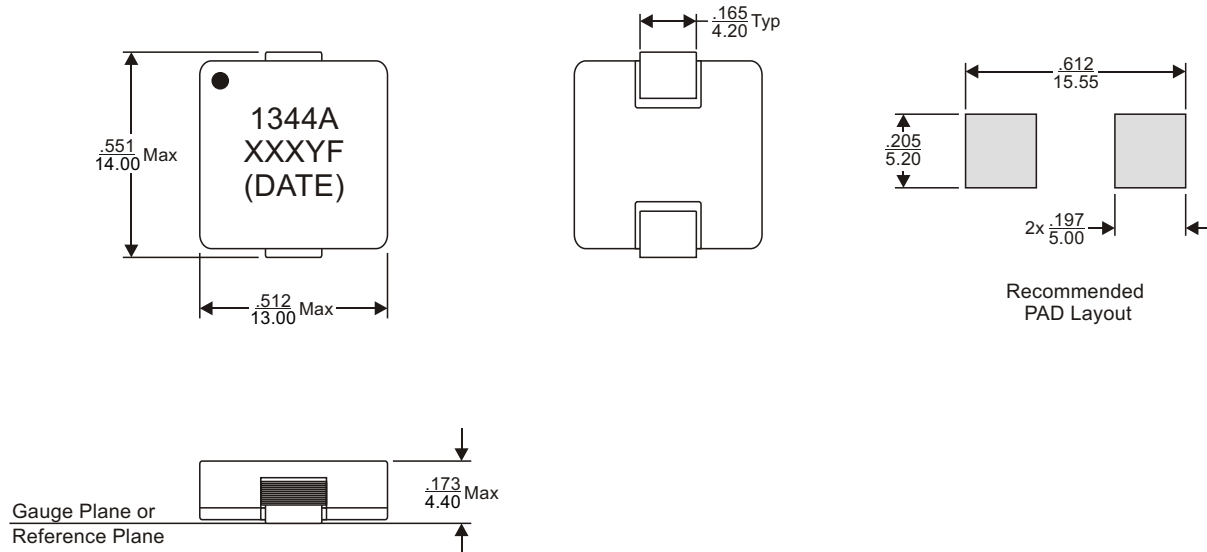


Notes:


- 7. All dimensions are specified in $\frac{\text{inches}}{\text{mm}}$ with higher precedence in mm.
- 8. Unless otherwise specified, all tolerances are $\pm \frac{.010}{0.25}$.

Weight (in gram)	: 3.5 typ.
Tape & Reel	: 800 / reel

SCHEMATIC



PACKAGING

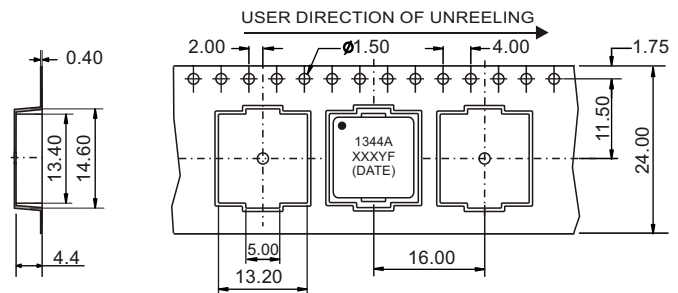

FOR MORE INFORMATION, PLEASE CONTACT

HEADQUARTER

1/F., Harbour View 1, No.12 Science Park East Avenue,
Phase II, Hong Kong Science Park, Shatin, N.T.

Hong Kong

Tel: (852) 2954 3333 Fax: (852) 2954 3304

Email: eempl@eleceltek.com

Website: <http://www.eleceltek.com> / www.eemagnetic.com

Information herein is for reference only and subject to change without notice. It does not constitute any representation, warranty or commitment of the company in respect of the products in any aspect. All logos, brands and product names mentioned herein are trademarks or registered trademarks of their respective owners. The company does not assume any liability arising out of the application or use of any product or circuit described herein. Copyrights 2009, E & E Magnetic Products Limited.