

Data Sheet

Customer:

Product: Wire Wound Chip Power Resistor –WR Series

Sizes.: 2615/3816/4525/6327

Issued Date: 14-Mar-18

Edition: REV.A1



VIKING TECH CORPORATION
光韻科技股份有限公司
No.70, Guangfu N. Rd., Hukou
Township, Hsinchu County
303, Taiwan (R.O.C)

TEL:886-3-5972931
FAX:886-3-5972935•886-3-5973494
E-mail:sales@viking.com.tw


VIKING TECH CORPORATION KAOHSIUNG BRANCH
光韻科技股份有限公司高雄分公司
No.248-3, Sin-Sheng Rd., Cian-Jhen Dist., Kaohsiung,
806, Taiwan

TEL:886-7-8217999
FAX:886-7-8228229
E-mail:sales@viking.com.tw

VIKING ELECTRONICS (WUXI) CO., LTD.
光韻電子(無錫)有限公司
No.22 Xixia Road, Machinery & Industry Park,
National Hi-Tech Industrial Development Zone
of Wuxi, Wuxi, Jiangsu Province, China
Zip Code:214028
TEL:86-510-85203339
FAX:86-510-85203667•86-510-85203977
E-mail:china@viking.com.tw

Produced by (QC)	Checked (QC)	Approved by (QC)	Prepared by (Sales)	Accepted by (Customer)
14-Mar-18	14-Mar-18	14-Mar-18	14-Mar-18	
<i>Kris Chen</i>	<i>Ben Chang</i>	<i>Ben Chang</i>		

Wire Wound Chip Power Resistor



■ Features

- Resistance range: 0.1 to 1.2KΩ
- Strong anti-lightening surge ability
- High loading power, can bear high power load
- Nonflammable epoxy resin hot-pressing encapsulated, firm in structure
- Low noise, low T.R.C, perfect stability and high reliability
- Good moisture-proof and environmental suitability
- Suitable for surface mounted (SMT) operating for automation
- Many kinds of size series for selection
- Non-inductive wire wound resistors is available that customized by customers


■ Applications

- Anti-thunder modules of microwave communication
- Power supply models of communication
- High power supply, lightning stroke surge suppression circuits
- Protection circuits of signal
- Power supply of STB or other terminal devices
- Anti-lightening protection Circuits of base station.

■ Part Numbering

WR	27	J	T	E	R	1001
Product Type	Dimensions (L1xB)	Resistance Tolerance	Packaging Code	TCR (PPM/°C)	Power Rating	Resistance
	15: 2615 16: 3816 25: 4525 27: 6327	D: ±0.5% F: ±1% G: ±2% J: ±5%	T: Taping Reel B: Bulk	B: ±10 A: ±20 D: ±50 E: ±100 F: ±200	U: 1/2W T: 1W S: 2W R: 3W H: 4W	0010: 1Ω 4R70: 4.7Ω 1001: 1KΩ

■ Dimensions

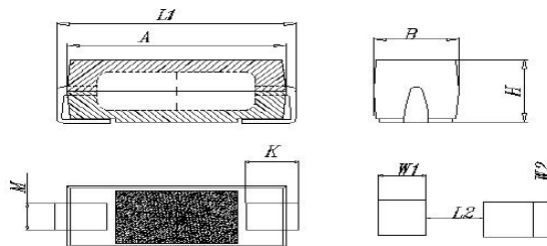


Unit: mm

Type	Size (Inch)	L1	A	B max.	H	K min.	M	W1	W2	L2	Packaging 330mm/13"
15	2615	6.6±0.5	5.6±0.5	4.0	3.2±0.25	1.2	1.0±0.4	2.0	2.0	4.0	2000pcs
16	3816	9.6±0.5	8.6±0.5	4.2	3.5±0.25	1.8	1.2±0.4	3.0	2.2	5.2	2000pcs
25	4525	11.4±0.5	10.2±0.5	6.5	4.6±0.25	2.2	2.0±0.4	3.2	2.5	7.0	1000pcs
27	6327	15.9±0.5	14.7±0.5	7.0	6.4±0.25	3.0	2.0±0.4	4.5	3.0	8.8	800pcs

Derating Curve

Power rating is defined as maximum power rating continuously applied under ambient temperature at 70°C. when the ambient temperature exceeds 70°C. The power consumption of the product below.

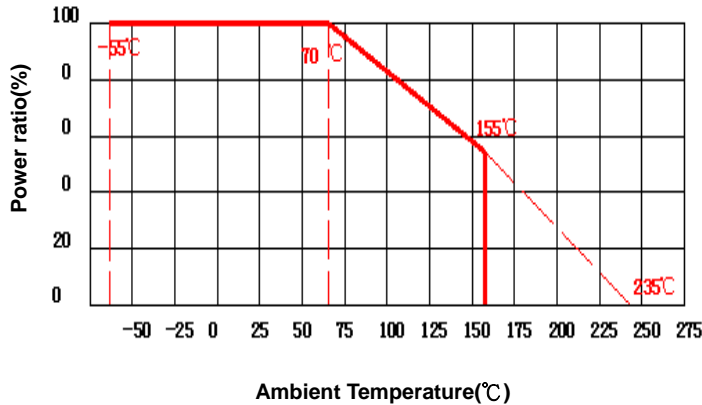

Rated Voltage

Rated voltage is defined as the DC or AC (effective Value at commercial frequency example 50 C/S,60 C/S) Voltage when rated power is applied and can be calculated By the following :

$$V = \sqrt{P \times R}$$

V = RATED VOLTAGE

P = RATED POWER (WATTS)

R = NOMINAL RESISTANCE VALUE (OHM)

When the calculated rated voltage exceeds the Maximum usable voltage flue shown in CHART, the Maximum usable voltage is defined as the voltage According to the power-decreasing curve shown in CHART.

Standard Electrical Specifications

Item Type	Power Rating	Operating Temp. Range	Max. Operating Voltage	Max. Overload Voltage	Dielectric Withstanding Voltage	Resistance Range				TCR (PPM/°C)
						±0.5%	±1%	±2%	±5%	
15 (2615)	1/2W 1W	-55 ~ +175°C (+275°C avail)	200V	350V	500V	0.22Ω – 150Ω				±20 ±50 ±100 ±200
16 (3816)	1W 2W	-55 ~ +175°C (+275°C avail)	250V	500V	500V	0.1Ω – 200Ω				±10 ±20 ±50 ±100 ±200
25 (4525)	2W 3W	-55 ~ +175°C (+275°C avail)	350V	700V	500V	0.22Ω – 1KΩ				±10 ±20 ±50 ±100 ±200
27 (6327)	3W 4W	-55 ~ +175°C (+275°C avail)	500V	800V	500V	0.1Ω – 1.2KΩ				±10 ±20 ±50 ±100 ±200

Environmental Characteristics

Item	Requirement	Test Method
Temperature Shock Test	±(5% +0.05Ω)	-25°C for 30min, 25°C for 10min and 70°C for 30min as a cycle, 5cycles
Short Time Overload	±(2% +0.05Ω)	RCWV*2.5 or Max. overload voltage whichever is lower for 5 seconds
Endurance	±(5% +0.05Ω)	70±3°C, RCWV for 1000±48 hrs with 1.5 hrs "ON" and 0.5 hrs "OFF"
Damp Heat with Load	±(5% +0.05Ω)	40±2°C, 90~95% R.H. RCWV for 1000±48 hrs with 1.5 hrs "ON" and 0.5 hrs "OFF"
Solderability	95% min. coverage	245±5°C for 3 seconds
Dielectric Withstand Voltage	1000MΩ	Apply 500V~1000V for 1 minute

Pulse Curve

