

## Data Sheet

**Customer:**

**Product:** SMD Power Inductor – PDH Series

**Sizes.:** 1608/1813/3316/4920/5022

**Issued Date:** 05-Jan-18

**Edition:** REV.B7



VIKING TECH CORPORATION  
光韻科技股份有限公司  
No.70, Guangfu N. Rd., Hukou  
Township, Hsinchu County  
303, Taiwan (R.O.C)

TEL:886-3-5972931  
FAX:886-3-5972935•886-3-5973494  
E-mail:sales@viking.com.tw




VIKING TECH CORPORATION KAOHSIUNG BRANCH  
光韻科技股份有限公司高雄分公司  
No.248-3, Sin-Sheng Rd., Cian-Jhen Dist., Kaohsiung,  
806, Taiwan

TEL:886-7-8217999  
FAX:886-7-8228229  
E-mail:sales@viking.com.tw

VIKING ELECTRONICS (WUXI) CO., LTD.  
光韻電子(無錫)有限公司  
No.22 Xixia Road, Machinery & Industry Park,  
National Hi-Tech Industrial Development Zone  
of Wuxi, Wuxi, Jiangsu Province, China  
Zip Code:214028  
TEL:86-510-85203339  
FAX:86-510-85203667•86-510-85203977  
E-mail:china@viking.com.tw

Produced by (QC)	Checked (QC)	Approved by (QC)	Prepared by (Sales)	Accepted by (Customer)
28-Aug-17	28-Aug-17	28-Aug-17	28-Aug-17	
<i>Kris Chen</i>	<i>Ben Chang</i>	<i>Ben Chang</i>		

## SMD Power Inductor

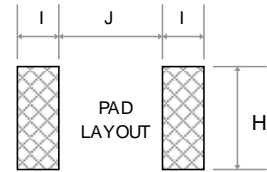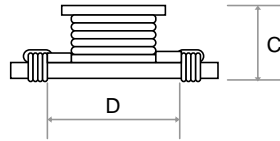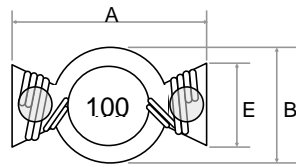

### Dimensions

Unit: mm

Type	A max.	B max.	C max.	D	E	H	I	J
PDH1608	7.50	5.20	3.20	4.60	2.5	4.00	2.0	4.00
PDH1813	8.89	6.40	5.00	5.80	3.0	3.00	2.0	5.00
PDH3316	13.21	9.91	6.35	9.50	4.5	6.50	2.5	8.64
PDH4920	19.40	13.30	6.80	12.7	6.6	8.00	3.8	11.70
PDH5022	22.35	16.26	8.00	16.0	8.0	8.64	4.3	14.35

### Features

- Miniature surface mount design
- High power, High saturation inductors
- Very low resistance
- Maximum power density
- Ideal inductors for DC-DC converters
- Available on tape and reel for auto surface mounting

### Inductance and rated current ranges

- PDH1608 0.47μH~22.0μH 7.7~0.70A
- PDH1813 0.18μH~180μH 11.9~0.50A
- PDH3316 0.18μH~100μH 20.0~1.20A
- PDH4920 0.47μH~100μH 25.1~1.80A
- PDH5022 0.78μH~470μH 30.0~0.80A
- Test equipment:  
L: HP4284A LCR meter  
DCR: Milli-ohm meter
- Electrical specifications at 25°C

### Applications

- Notebook Computers
- Handheld Communications
- LCD Televisions
- Power Supply For VTRs
- DC/DC Converters, etc.

### Characteristics

- Saturation Rated Current :The current when the inductance becomes 30% lower than its initial value.(Ta=25°C)
- Operating temperature range: -40~125°C

### Product Identification

PDH	1813	M	T	101
Product Type	Dimensions (AxBxC)	Inductor Tolerance	Packaging Style	Inductance
	1608: 7.5x5.2x3.2 1813: 8.89x6.4x5.0 3316: 13.21x9.91x6.35 4920: 19.4x13.3x6.8 5022: 22.35x16.26x8.0	M: ±20% N: ±30% P: +40%-20%	T: Tape and Reel	1R0: 1.0μH 470: 47μH 101: 100μH

**SMD Power Inductor**

**■Electrical Characteristics**

PDH1608 Type(□:Tolerance):

Part No	L (μH)	Tolerance	Test Condition	DCR (Ω) max.	IDC (A) max.
PDH1608□TR47	0.47	P	100KHz, 0.1V	0.025	7.7
PDH1608□T1R0	1.0	M	100KHz, 0.1V	0.050	2.9
PDH1608□T1R5	1.5	M	100KHz, 0.1V	0.050	2.6
PDH1608□T2R2	2.2	M	100KHz, 0.1V	0.070	2.3
PDH1608□T3R3	3.3	M	100KHz, 0.1V	0.080	2.0
PDH1608□T4R7	4.7	M	100KHz, 0.1V	0.090	1.5
PDH1608□T6R8	6.8	M	100KHz, 0.1V	0.130	1.2
PDH1608□T100	10	M	100KHz, 0.1V	0.160	1.1
PDH1608□T150	15	M	100KHz, 0.1V	0.230	0.9
PDH1608□T220	22	M	100KHz, 0.1V	0.370	0.7

PDH1813 Type(□:Tolerance):

Part No	L (μH)	Tolerance	Test Condition	DCR (Ω) max.	IDC (A) max.
PDH1813□TR18	0.18	N	100KHz, 0.1V	0.005	11.9
PDH1813□TR33	0.33	N	100KHz, 0.1V	0.007	11.7
PDH1813□TR47	0.47	N	100KHz, 0.1V	0.008	10.8
PDH1813□TR50	0.50	M	100KHz, 0.1V	0.009	8.00
PDH1813□TR56	0.56	M	100KHz, 0.1V	0.010	7.70
PDH1813□T1R0	1.0	M	100KHz, 0.1V	0.016	7.30
PDH1813□T1R2	1.2	M	100KHz, 0.1V	0.017	5.30
PDH1813□T2R2	2.2	M	100KHz, 0.1V	0.035	3.50
PDH1813□T3R3	3.3	M	100KHz, 0.1V	0.040	3.00
PDH1813□T3R9	3.9	M	100KHz, 0.1V	0.051	3.00
PDH1813□T4R7	4.7	M	100KHz, 0.1V	0.054	2.60
PDH1813□T5R6	5.6	M	100KHz, 0.1V	0.071	2.40
PDH1813□T6R8	6.8	M	100KHz, 0.1V	0.080	2.20
PDH1813□T8R2	8.2	M	100KHz, 0.1V	0.095	2.00
PDH1813□T100	10	M	100KHz, 0.1V	0.111	1.90
PDH1813□T120	12	M	100KHz, 0.1V	0.148	1.70
PDH1813□T150	15	M	100KHz, 0.1V	0.170	1.50
PDH1813□T180	18	M	100KHz, 0.1V	0.231	1.30
PDH1813□T220	22	M	100KHz, 0.1V	0.250	1.20
PDH1813□T270	27	M	100KHz, 0.1V	0.330	1.10
PDH1813□T330	33	M	100KHz, 0.1V	0.350	0.99
PDH1813□T390	39	M	100KHz, 0.1V	0.450	0.96
PDH1813□T470	47	M	100KHz, 0.1V	0.470	0.87
PDH1813□T560	56	M	100KHz, 0.1V	0.648	0.85
PDH1813□T680	68	M	100KHz, 0.1V	0.730	0.68
PDH1813□T820	82	M	100KHz, 0.1V	1.000	0.81
PDH1813□T101	100	M	100KHz, 0.1V	1.110	0.53
PDH1813□T181	180	M	100KHz, 0.1V	2.300	0.50

**■Electrical Characteristics**

PDH3316 Type(□:Tolerance):

Part No	L (μH)	Tolerance	Test Condition	DCR (Ω) max.	IDC (A) max.
PDH3316□TR18	0.18	N	100KHz, 0.1V	0.002	20.00
PDH3316□TR33	0.33	M	100KHz, 0.1V	0.002	20.00
PDH3316□TR68	0.68	M	100KHz, 0.1V	0.005	13.00
PDH3316□T1R0	1.0	M	100KHz, 0.1V	0.006	9.90
PDH3316□T1R5	1.5	M	100KHz, 0.1V	0.008	7.90
PDH3316□T2R2	2.2	M	100KHz, 0.1V	0.011	6.10
PDH3316□T2R7	2.7	M	100KHz, 0.1V	0.012	5.50
PDH3316□T3R3	3.3	M	100KHz, 0.1V	0.014	5.10
PDH3316□T3R9	3.9	M	100KHz, 0.1V	0.017	4.45
PDH3316□T4R7	4.7	M	100KHz, 0.1V	0.018	4.20
PDH3316□T5R6	5.6	M	100KHz, 0.1V	0.020	4.05
PDH3316□T6R8	6.8	M	100KHz, 0.1V	0.027	3.60
PDH3316□T8R2	8.2	M	100KHz, 0.1V	0.026	3.35
PDH3316□T100	10	M	100KHz, 0.1V	0.038	3.30
PDH3316□T120	12	M	100KHz, 0.1V	0.040	3.00
PDH3316□T150	15	M	100KHz, 0.1V	0.045	2.40
PDH3316□T180	18	M	100KHz, 0.1V	0.061	2.25
PDH3316□T220	22	M	100KHz, 0.1V	0.070	2.00
PDH3316□T270	27	M	100KHz, 0.1V	0.090	1.85
PDH3316□T330	33	M	100KHz, 0.1V	0.100	1.70
PDH3316□T390	39	M	100KHz, 0.1V	0.120	1.55
PDH3316□T470	47	M	100KHz, 0.1V	0.150	1.40
PDH3316□T560	56	M	100KHz, 0.1V	0.173	1.35
PDH3316□T680	68	M	100KHz, 0.1V	0.220	1.20
PDH3316□T820	82	M	100KHz, 0.1V	0.252	1.00
PDH3316□T101	100	M	100KHz, 0.1V	0.280	0.95

PDH4920 Type(□:Tolerance):

Part No	L (μH)	Tolerance	Test Condition	DCR (Ω) max.	IDC (A) max.
PDH4920□TR47	0.47	P	100KHz, 0.1V	0.003	25.1
PDH4920□T1R0	1.0	P	100KHz, 0.1V	0.004	15.3
PDH4920□T1R5	1.5	P	100KHz, 0.1V	0.006	12.0
PDH4920□T2R2	2.2	M	100KHz, 0.1V	0.008	10.2
PDH4920□T3R3	3.3	M	100KHz, 0.1V	0.009	9.3
PDH4920□T4R7	4.7	M	100KHz, 0.1V	0.012	7.7
PDH4920□T6R8	6.8	M	100KHz, 0.1V	0.019	6.2
PDH4920□T100	10	M	100KHz, 0.1V	0.027	5.2
PDH4920□T150	15	M	100KHz, 0.1V	0.032	4.3
PDH4920□T220	22	M	100KHz, 0.1V	0.050	3.7
PDH4920□T330	33	M	100KHz, 0.1V	0.069	3.0
PDH4920□T470	47	M	100KHz, 0.1V	0.109	2.4
PDH4920□T680	68	M	100KHz, 0.1V	0.156	2.0
PDH4920□T101	100	M	100KHz, 0.1V	0.206	1.8


**■Electrical Characteristics**

PDH5022 Type(□:Tolerance):

Part No	L (μH)	Tolerance	Test Condition	DCR (Ω) max.	IDC (A) max.
PDH5022□TR78	0.78	N	100KHz, 0.1V	0.003	30.0
PDH5022□TR80	0.80	N	100KHz, 0.1V	0.003	30.0
PDH5022□T1R0	1.0	M	100KHz, 0.1V	0.004	25.0
PDH5022□T1R5	1.5	M	100KHz, 0.1V	0.004	25.0
PDH5022□T1R8	1.8	M	100KHz, 0.1V	0.005	20.0
PDH5022□T2R2	2.2	M	100KHz, 0.1V	0.006	20.0
PDH5022□T3R3	3.3	M	100KHz, 0.1V	0.009	17.0
PDH5022□T3R9	3.9	M	100KHz, 0.1V	0.010	15.0
PDH5022□T4R7	4.7	M	100KHz, 0.1V	0.014	13.0
PDH5022□T5R6	5.6	M	100KHz, 0.1V	0.016	12.5
PDH5022□T6R0	6.0	M	100KHz, 0.1V	0.017	12.0
PDH5022□T6R8	6.8	M	100KHz, 0.1V	0.018	11.5
PDH5022□T7R8	7.8	M	100KHz, 0.1V	0.018	11.0
PDH5022□T8R2	8.2	M	100KHz, 0.1V	0.022	10.5
PDH5022□T100	10	M	100KHz, 0.1V	0.026	10.0
PDH5022□T120	12	M	100KHz, 0.1V	0.030	8.5
PDH5022□T150	15	M	100KHz, 0.1V	0.032	8.0
PDH5022□T180	18	M	100KHz, 0.1V	0.040	7.5
PDH5022□T220	22	M	100KHz, 0.1V	0.043	7.00
PDH5022□T330	33	M	100KHz, 0.1V	0.066	6.00
PDH5022□T470	47	M	100KHz, 0.1V	0.096	5.00
PDH5022□T680	68	M	100KHz, 0.1V	0.130	4.00
PDH5022□T101	100	M	100KHz, 0.1V	0.165	3.00
PDH5022□T151	150	M	100KHz, 0.1V	0.250	2.50
PDH5022□T221	220	M	100KHz, 0.1V	0.396	2.40
PDH5022□T331	330	M	100KHz, 0.1V	0.588	1.00
PDH5022□T471	470	M	100KHz, 0.1V	0.950	0.80

SMD Power Inductor

■Tape and Reel specifications

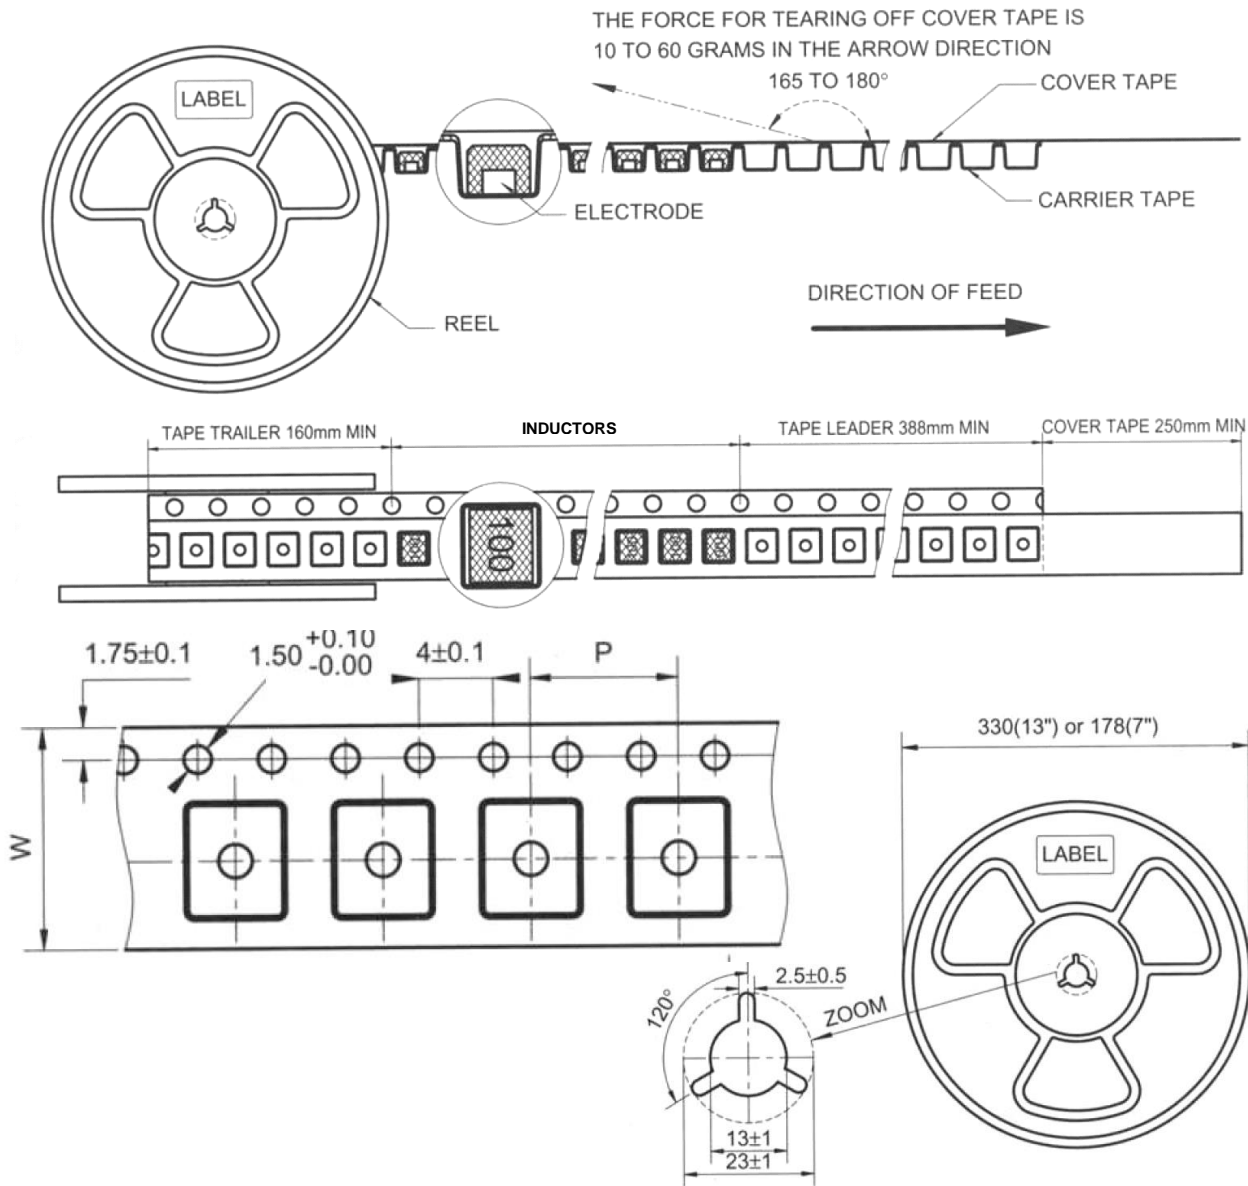

Unit: mm

Type	Tape size		Parts Per Reel
	W	P	13"
PDH1608	16	8	1500
PDH1813	16	12	1000
PDH3316	24	16	750
PDH4920	32	20	350
PDH5022	44	20	250

**SMD Power Inductor**

**■ SMD Power Inductor Environmental Specifications**

General

Items	Specifications
Shelf Storage conditions	Temperature range: 15~28°C ; Humidity: <80% relative humidity. Recommended product should be used within one year from the time of delivery.

Environmental test

Test Items	Specifications	Test Conditions / Test Methods
High temperature Storage test	No case deformation or change in appearance. $\Delta L/L \leq 10\%$	Temperature 85±2°C, Time: 48±2 hours, Tested after 1 hour at room temperature.
Low temperature Storage test		Temperature -40±2°C, Time: 48±2 hours, Tested after 1 hour at room temperature.
Humidity test		Temperature 40±2°C, 90~95% relative humidity Time: 96±2 hours Tested after 1 hour at room temperature.
Thermal shock test		First -25°C 30minutes then 25°C 10 minutes last 85°C 30 minutes, as 1 cycle. Go through 5 cycles. Tested after 1 hour at room temperature.

Mechanical test

Test Items	Specifications	Test Conditions / Test Methods
Solderability test	Terminal area must have 90% minimum solder coverage.	Product with Lead-free terminal: Dip pads in flux then dip in solder pot at 245±5°C for 3 seconds.
Resistance to Soldering Heat	No case deformation or change in appearance.	Flux should cover the whole of the sample before heating, then be preheated for about 2 minutes over temperature of 130~150°C. Immersing to 260±5°C for 10 seconds.
Vibration test	No case deformation or change in appearance. $\Delta L/L \leq 10\%$	Apply frequency 10~55Hz. 1.5mm amplitude in each of perpendicular direction for 2 hours.
Shock resistance		Drop down with 981m/s <sup>2</sup> (100G) shock attitude upon a rubber block method shock testing machine, for 1 time. In each of three orientations.

The condition of reflow (recommendation):

