


FN

- 耐高纹波,长寿命,85℃ 5000 小时 ,可用于大功率电源、UPS 不间断电源、变频器等电路中。
High ripple current ,Long life ,Load life of 5000 hours at 85℃ .
Used large power source,Uninterruptible power supplies ,Frequency converter circuit .etc.
- ROHS 指令已对应完毕。Adapted to the ROHS directive



主要技术性能 Specifications

项目 Item	特性 Performance Characteristics
使用温度范围 Operating temperature range	-25℃ ~ +85℃
额定电压范围 Rated voltage range	350 ~ 450 V
标称电容量允许偏差 Capacitance tolerance	±20% (120Hz, +20℃)
漏电流 Leakage current	$I \leq 0.01CV(\mu A)$ 或5mA 5分钟 取较小值 (at 20℃, after 5 minutes ,Whichever is smaller)
损耗角正切值 (tg δ) Dissipation factor (+20℃, 120Hz)	≤ 0.15
温度特性 Temperature characteristics (Impedance ratio at 120Hz)	Rated Voltage (V) 350~450
	$Z_{-25℃}/Z_{+20℃}$ 8
高温贮存 Shelf life	+85℃,1000 小时贮存后,加额定工作电压处理 30 分钟,恢复 16 小时后: After storage for 1000 hours at +85℃ , U_R to be applied for 30 minutes and then resumed 16 hours 电容量变化率 Capacitance change : ±20%初始测量值以内 Initial measured value 漏电流 Leakage current : ≤初始规定值 Initial specified value 损耗角正切值 Dissipation factor : ≤2倍初始规定值 2times Initial specified value


	使用寿命 (Useful Life)		负载寿命 (Load Life)	耐久性测试 (Endurance Test)
寿命时间 (Lifetime)	10000h	>75000h	5000h	5000h
漏电流 (Leakage Current)	≤初始规定值 Not more than specified value		≤初始规定值 Not more than specified value	≤初始规定值 Not more than specified value
电容量变化率 (Caacitance Change)	±30%初始测量值内 Within ±30% initial value		±20%初始测量值内 Within ±20% initial value	±10%初始测量值内 Within ±10% initial value
损耗角正切值 (Dissipation Factor)	≤3 倍初始规定值 Not more than 300% of specified value		≤2倍初始规定值 Not more than 200% of specified value	≤1.3 倍初始规定值 Not more than 130% of specified value
应用条件 (Condition): 应用电压 (Applied Voltage) 应用电流 (Applied Current) 应用温度 (Applied Temperature) 失效率 (Outlier Percentage)	U_R I_R 85℃ ≤1%	U_R $1.4 \times I_R$ 40℃ ≤1%	U_R I_R 85℃ 0%	U_R $I_R=0$ 85℃ IEC60384

纹波电流的相关参数 Multiplier for Ripple Current

频率系数 Frequency Coefficient

Frequency (Hz)	50	100 (120)	300	1k	≥10K
Rated Voltage (V)					
350~450	0.70	1.00	1.10	1.30	1.40

寿命时间图 Life Time Graph

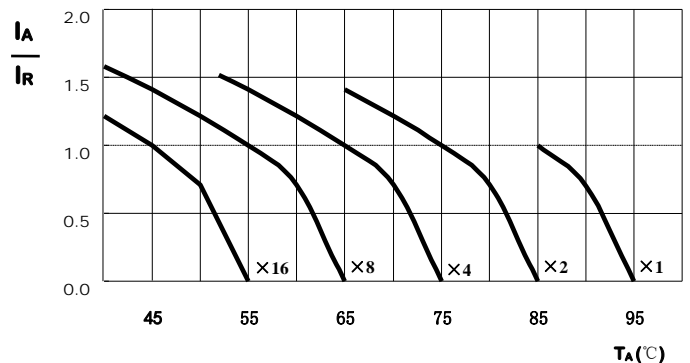

此图表示电容的使用寿命时间

The graphs shows a typical trend of the standard capacitor useful life.

技术参数 Technical data

Rated Voltage	Surge Voltage	Rated Capacitance	Dissipation Factor MAX	Max ESR 20°C, 120Hz	Typ ESR 20°C, 120Hz	Max Ripple Current 85°C,120Hz	SIZE
(V.D.C)	(V.D.C)	(μ F)	-	(m Ω)	(m Ω)	(Arms)	Φ D×L(mm)
350	400	1500	0.15	132	70.8	5.4	51×80
		2200	0.15	90.5	48.3	7.5	51×105
		2200	0.15	90.5	48.3	7.8	63.5×80
		2700	0.15	73.7	39.3	9.2	63.5×80
		3300	0.15	60.3	32.2	10.6	63.5×105
		3900	0.15	51.0	27.2	11.7	63.5×105
		4700	0.15	42.3	22.6	12.5	63.5×135
		4700	0.15	42.3	22.6	13	76×105
		5600	0.15	35.5	19.0	14.5	63.5×145
		6800	0.15	29.3	15.6	17.8	76×135
		8200	0.15	24.3	12.9	20.8	76×170
		10000	0.15	19.9	10.6	24.6	76×190
12000	0.15	16.6	8.8	27.8	76×220		
400	450	1000	0.15	212	112	4.9	51×80
		1500	0.15	141	75.2	6.8	51×105
		2200	0.15	96.5	51.3	8.1	63.5×80
		2700	0.15	78.6	41.8	9.2	63.5×105
		3300	0.15	64.3	34.2	10.6	63.5×115
		3900	0.15	54.4	28.9	12.3	76×110
		4700	0.15	45.2	24.0	14.4	76×130
		5600	0.15	37.9	20.1	16.5	76×145
		6800	0.15	31.2	16.6	18.1	76×170
		8200	0.15	25.9	13.8	20.8	76×190
10000	0.15	21.2	11.3	23.2	76×220		
450	500	1000	0.15	238	119	5.2	51×105
		1500	0.15	159	79.6	6.7	63.5×80
		2200	0.15	108	54.3	9.1	63.5×105
		2700	0.15	88.5	44.2	10.5	76×105
		3300	0.15	72.4	36.2	11.8	63.5×145
		3900	0.15	61.2	30.6	13.2	76×130
		4700	0.15	50.8	25.4	14.8	76×155
		5600	0.15	42.7	21.3	16.9	76×170
		6800	0.15	35.1	17.6	19.3	76×190
		8200	0.15	29.1	14.6	21.3	76×220
		10000	0.15	23.5	11.8	23.5	89×200