


1. Features

1. Monolithic inorganic material construction.
2. Closed magnetic circuit avoids crosstalk.
3. S.M.T. type.
4. Suitable for reflow soldering.
5. Shapes and dimensions follow E.I.A. spec.
6. Available in various sizes.
7. Excellent solder ability and heat resistance.
8. High reliability.
9. 100% Lead(Pb) & Halogen-Free and RoHS compliant.



Certificate
of
GreenPartner

2. Dimensions

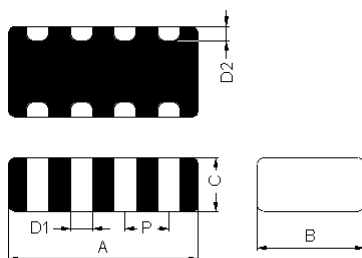

Chip Size						
Size	A(mm)	B(mm)	C(mm)	D1(mm)	D2(mm)	P(mm)
3216	3.2±0.2	1.6±0.2	0.9±0.2	0.4±0.15	0.3±0.1	0.8±0.1

3. Part Numbering



- A: Series
 B: Dimension L x W
 C: Material Lead Free Material
 D: Impedance 300=30Ω
 E: Packaging T=Taping and Reel, B=Bulk(Bags)
 F: Rated Current 05=500mA

4. Specification

Tai-Tech Part Number	Impedance (Ω)	Test Frequency (MHz)	DC Resistance (Ω) max.	Rated Current (mA) max.
FCA3216KF4-300T05	30±25%	100	0.20	500
FCA3216KF4-600T04	60±25%	100	0.25	400
FCA3216KF4-121T03	120±25%	100	0.30	350
FCA3216KF4-301T02	300±25%	100	0.40	250
FCA3216KF4-601T02	600±25%	100	0.50	200
FCA3216KF4-102T01	1000±25%	100	0.75	150
FCA3216MF4-300T04	30±25%	100	0.25	400
FCA3216MF4-600T03	60±25%	100	0.30	300
FCA3216MF4-121T02	120±25%	100	0.40	250
FCA3216MF4-301T02	300±25%	100	0.50	200

- Rated current: based on temperature rise test
- In compliance with EIA 595

Impedance Frequency Characteristics(Typical)

