

DATA SHEET

SkelCap
ULTRACAPACITOR

- + Capacitance 500 - 3200 F
- + Extreme power density
- + Durable and safe aluminum casings
- + Weldable terminals
- + High cycle life >1,000,000 cycles
- + High temperature tolerance (operating and storage)
- + Made in EU
- + RoHS compliant
- + UL certified



GENERAL SPECIFICATIONS

Rated voltage V_R	2.85 V
Surge voltage	3.0 V
Specific energy	5.1 - 6.8 Wh/kg
Specific power, typical	42 - 80 kW/kg
Power density, typical	58 - 112 kW/L

TEMPERATURE AND LIFE

Operating temperature range	
Minimum	-40 °C
Maximum	+65 °C
Storage temperature range (uncharged)	
Minimum	-40 °C
Maximum	+60 °C
Life	
Storage life @ RT, uncharged	10 years
Cyclelife @ RT, between V_R and $V_R/2$	1,000,000 cycles
Lifetime @ 65 °C and V_R	1,500 hours

PACKAGE DETAILS

UNIT SCA0500 SCA0750 SCA1200 SCA1800 SCA3200

Package quantity	pcs	49	49	25	25	25
Package weight	kg	6.2	8.0	7.2	9.3	14.2
Package height	mm	120	120	170	170	170
Package width	mm	395	395	395	395	395
Package depth	mm	395	395	395	395	395

ELECTRICAL

UNIT SCA0500 SCA0750 SCA1200 SCA1800 SCA3200

Rated voltage	V	2.85	2.85	2.85	2.85	2.85
Rated capacitance	F	500	750	1200	1800	3200
Initial capacitance, typical	F	540	790	1260	1880	3370
ESR DC per IEC62391-1, rated / typical	mΩ	0.60 / 0.40	0.50 / 0.36	0.24 / 0.19	0.21 / 0.17	0.16 / 0.13
DC 10ms ESR (\approx AC 100 Hz), rated / typical	mΩ	0.45 / 0.30	0.35 / 0.27	0.18 / 0.15	0.16 / 0.13	0.14 / 0.11
DC 1s ESR (\approx AC 0.1 Hz), rated / typical	mΩ	0.70 / 0.55	0.60 / 0.40	0.29 / 0.23	0.27 / 0.20	0.18 / 0.14
Maximum peak current, for 1 second ¹	kA	0.6	0.8	1.3	1.9	3.0
Leakage current, 2.85 V (After 72 hours, 25 °C)	mA	1.6	2.5	4.5	6.3	11.0
Leakage current, 2.7 V (After 72 hours, 25 °C)	mA	1.1	1.7	3.5	4.5	8.5

SAFETY

Short circuit current, typical (Possible current with short circuit @ rated voltage. Don't use as operating current)	kA	7	8	15	17	22
--	----	---	---	----	----	----

ENERGY, based on rated capacitance

Stored energy ²	Wh	0.56	0.85	1.35	2.03	3.6
Specific energy ³	Wh/kg	5.1	5.8	5.4	6.0	6.8
Energy density ⁴	Wh/L	7.1	7.9	7.6	8.5	9.3

POWER*

Power, (matched impedance), typical ⁵	kW	8.8	9.7	18.5	15.6	18.5
Specific power, matched impedance, minimum ⁶	kW/kg	61	49	57	37.7	27.2
Specific power, matched impedance, typical ⁶	kW/kg	80	66	73	46.4	34.6
Power density, matched impedance, minimum ⁷	kW/L	86	68	81	52.9	37.2
Power density, matched impedance, typical ⁷	kW/L	112	90	104	65.1	47.3

STANDARDS AND CERTIFICATIONS

Vibration Specification	ISO 16750-3, Table 14, Table 12
Certifications	RoHS

THERMAL*


Thermal resistance, R_{ca} , typical	°C/W	7.1	6.6	5.7	4.3	3.0
Thermal capacitance, C_{th} , typical	J/°C	110	159	253	335	634
Max continuous current, $\Delta T = 15^\circ C$ ⁸	A	96	104	154	165	214
Max continuous current, $\Delta T = 40^\circ C$ ⁸	A	157	170	252	269	350

PHYSICAL PARAMETERS

Mass, typical (± 3 -6g mm, from small to large size)	kg	0.111	0.147	0.253	0.337	0.533
Volume	L	0.079	0.107	0.178	0.240	0.390
Diameter (± 0.2 mm, including label), D1	mm	40.2	40.2	60.2	60.2	60.2
Length (± 0.3 mm), L1	mm	63	85	63	85	138
Terminal diameter, D2	mm	8	8	12	12	12
Terminal length, L2	mm	3.2	3.2	3.2	3.2	3.2

$$(1) \text{ Maximum peak current (1 sec)} = \frac{1/2 CV}{C \times \text{ESR} + 1s} \quad (2) E_{\text{stored}} = \frac{1/2 CV^2}{3,600} \quad (3) E_{\text{max}} = \frac{1/2 CV^2}{3,600 \times \text{mass}} \quad (4) E_{\text{max}} = \frac{1/2 CV^2}{3,600 \times \text{volume}}$$

$$(5) P_{\text{max}} = \frac{V^2}{4 \times \text{ESR}} \quad (6) P_{\text{max}} = \frac{V^2}{4 \times \text{ESR} \times \text{mass}} \quad (7) P_{\text{max}} = \frac{V^2}{4 \times \text{ESR} \times \text{volume}} \quad (8) I_{\text{max}} = \sqrt{\frac{\Delta T}{\text{ESR} \times R_{\text{th}}}}$$

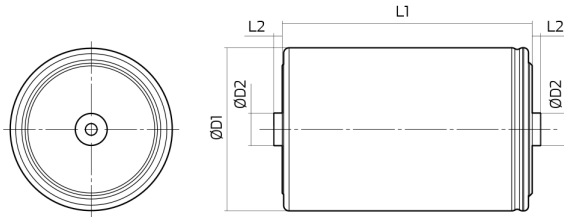

Typical value represents the mean production sample value.
Rated value represents the absolute minimum capacitance or maximum ESR value of production sample.

*Power values calculated using DC 10ms ESR \approx AC 100Hz.

Standard markings

- + Name of Manufacturer, Part number, Serial number, Rated voltage
- + Rated capacitance, Negative and positive terminals, Warning marking
- + Total energy in watt-hours
- + Electrolyte material used

Notes

- + Testing instructions available on www.skeletontech.com
- + All information provided on this data sheet and all subsequent ultra-capacitors sales and testing are subject to Standard Terms of Service (ToS) available on www.skeletontech.com, document *General Terms of Sale for Skeleton Technologies OÜ*.

Skeleton Technologies GmbH

Sales and Headquarters
Schücostraße 8, 01900 Großröhrsdorf, Germany
info@skeletontech.com

www.skeletontech.com