

MINIATURE ALUMINUM ELECTROLYTIC CAPACITORS



New

QY

Long Life
Series


- High reliability withstanding 13000 hours load life at 105°C
- Complied to the RoHS directive, Halogen-Free



Item	Characteristics		
Operating temperature range	-25 ~ +105°C		
Leakage current max.	$I = 0.01CV$ or $3\mu A$ (after 2 minutes)		
Capacitance tolerance	$\pm 20\%$ at 120Hz, 20°C		
Dissipation factor max. (at 120Hz, 20°C)	WV	35	50
	$\tan\delta$	0.22	0.19
Low temperature characteristics (Impedance ratio at 120Hz)	WV	35	50
	$Z-25^\circ C/Z+20^\circ C$	3	3
Load life (after application of the rated voltage for 13000 hours at 105°C)	Leakage current	Less than specified value	
	Capacitance change	Within $\pm 30\%$ of initial value	
	$\tan\delta$	Less than 300% of specified value	
Shelf life (at 105°C)	After 1000 hours no load test, leakage current, capacitance and $\tan\delta$ are same as load life value. The measurement shall be performed at 20°C by the KS C IEC 60384 - 4		

● DRAWING

Unit : mm

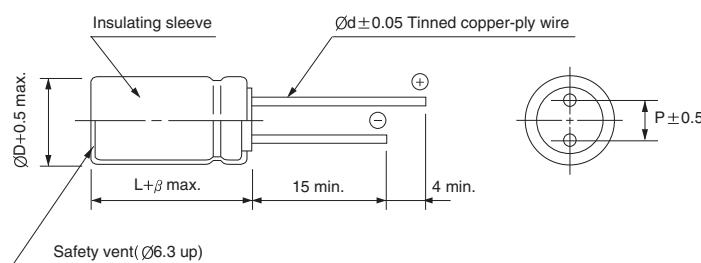

ØD	6.3	8	10	12.5
P	2.5	3.5	5.0	5.0
Ød	0.5	0.5	0.6	0.6
β	1.5		2.0	

● DIMENSIONS & MAXIMUM PERMISSIBLE RIPPLE CURRENT

μF	WV	35		50			
		22	47	6.3 × 11	205	6.3 × 11	228
22							
47							
100							
220							
330							
470							
560							

Ripple current (mA rms) at 105°C, 100kHz
Case size $\text{ØD} \times \text{L}$ (mm)

● FREQUENCY COEFFICIENT OF PERMISSIBLE RIPPLE CURRENT

μF	Frequency	120Hz	1kHz	10kHz	50kHz	100kHz \leq
~ 33		0.25	0.50	0.75	0.90	1.00
47 ~		0.30	0.55	0.80	0.90	1.00